


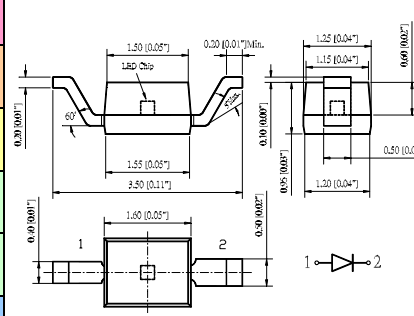
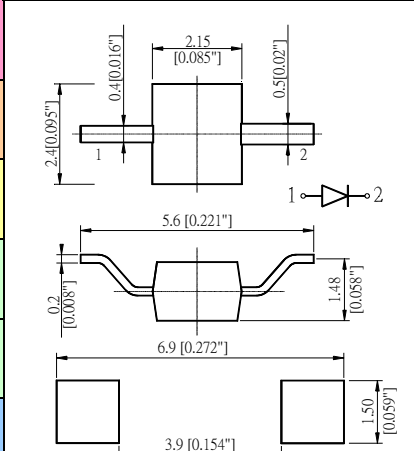
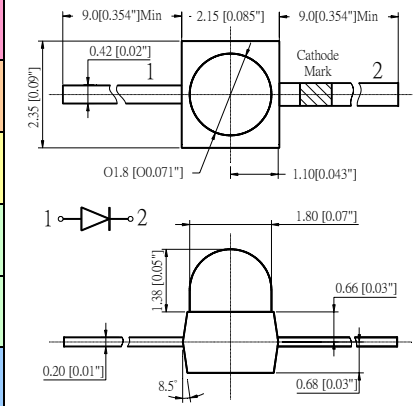


AR1216				AR2124				AX180			
											
Part No.	Material	Emitter Color	Pin	Lens Type	Wave Length λp(nm)	At 20mA		View Angle 2θ½ (deg)	Package Dimension		
						Vf (V) Typ.	Iv (mcd) Min				
AR1216UIC	---	Orange Red	---	Water Clear	640	2.0	80	150			
AR1216UOC	---	Orange	---	Water Clear	610	2.2	80	150			
AR1216UYC	---	Yellow	---	Water Clear	595	2.0	80	150			
AR1216UGC	---	Green	---	Water Clear	575	2.0	25	150			
AR1216ZGC	---	Green	---	Water Clear	520	3.3	160	150			
AR1216UBC	---	Blue	---	Water Clear	460	3.50	40	150			
AR2124UIC	---	Orange Red	---	Water Clear	640	2.0	80	150			
AR2124UOC	---	Orange	---	Water Clear	610	2.2	80	150			
AR2124UYC	---	Yellow	---	Water Clear	595	2.0	80	150			
AR2124UGC	---	Green	---	Water Clear	575	2.0	25	150			
AR2124ZGC	---	Green	---	Water Clear	520	3.3	160	150			
AR2124UBC	---	Blue	---	Water Clear	460	3.50	40	150			
AX180UIC	---	Orange Red	---	Water Clear	640	2.0	1120(Typ.)	20			
AX180UOC	---	Orange	---	Water Clear	610	2.2	2400(Typ.)	20			
AX180UYC	---	Yellow	---	Water Clear	595	2.0	1550(Typ.)	20			
AX180UGC	---	Green	---	Water Clear	575	2.0	525(Typ.)	20			
AX180ZGC	---	Green	---	Water Clear	520	3.3	950	20			
AX180UBC	---	Blue	---	Water Clear	460	3.50	200	20			

NOTES:

1. All dimensions are in millimeters.
2. Tolerance is +/- 0.2mm unless otherwise specified
3. Protruded resin under flange is 1.5mm MAX.
4. Specifications are subject to change without notice.