



264

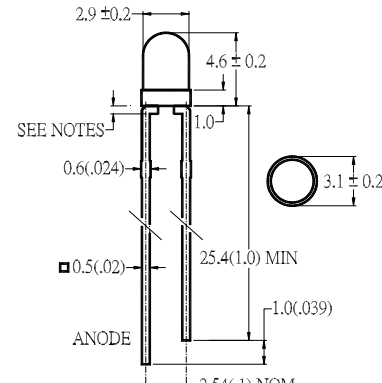

Part No.	Material	Emitter Color	Lens Type	Wave Length λ_p (nm)	At 20mA		View Angle $2\theta_{1/2}$ (deg)	Package Dimension
					V _f (V) Typ.	I _v (mcd) Typ.		
264UID-1	---	Red	Red Diffused	640	1.9	160	70	
264UGD-1	---	Green	Green Diffused	575	2.1	160	70	
264ZGD-5	---	Green	Green Diffused	525	3.2	980	70	
264UYD-1	---	Yellow	Yellow Diffused	593	2	160	70	
264UOD-1	---	Orange	Orange Diffused	610	1.9	230	70	
264UBW-4	---	Blue	White Diffused	470	3.5	460	70	
264UWW4	---	White	White Diffused	X=0.3 Y=0.3	3.5	1100	70	
264URC-2	---	Red	Water Clear	660	1.9	800	40	
264UIC-1	---	Red	Water Clear	640	1.9	700	40	
264UIC-2	---	Red	Water Clear	640	1.9	1320	40	
264UIC-5	---	Red	Water Clear	640	1.9	4000	40	
264TSC-1	---	Red	Water Clear	630	2.2	5200	40	
264UGC-1	---	Green	Water Clear	568	2.1	520	40	
264ZGC-5	---	Pure Green	Water Clear	525	3.2	3800	40	
264XGC-5	---	Bluish Green	Water Clear	515	3.2	4200	40	
264UYC-1	---	Yellow	Water Clear	593	2	700	40	
264UYC-2	---	Yellow	Water Clear	593	2	1320	40	
264UYC-5	---	Yellow	Water Clear	593	2	4200	40	
264TYC-1	---	Yellow	Water Clear	590	2.3	5200	40	
264UOC-1	---	Orange	Water Clear	610	1.9	960	40	
264UBC-2	---	Blue	Water Clear	470	3.5	1500	40	
264UWC-2	---	White	Water Clear	X=0.3 Y=0.3	3.5	3800	45	
264UBC-5	---	Blue	Water Clear	470	3.5	2000	40	
264UWC-5	---	White	Water Clear	X=0.3 Y=0.3	3.5	4500	45	
264UWC-9	---	White	Water Clear	X=0.3 Y=0.3	3.5	10500	45	

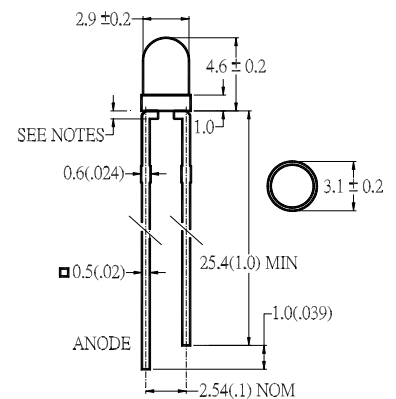

NOTES:

1. All dimensions are in millimeters.
2. Tolerance is +/- 0.2mm unless otherwise specified
3. Protruded resin under flange is 1.5mm MAX.
4. Specifications are subject to change without notice