


563



Part No.	Material	Emitter Color	Lens Type	Wave Length λ_p (nm)	At 20mA		View Angle $2\theta_{1/2}$ (deg)	Package Dimension
					Vf (V) Typ.	Iv (mcd) Typ.		
563URC-2	---	Red	Water Clear	660	1.9	500	30	
563UIC-1	---	Red	Water Clear	640	1.9	450	30	
563UIC-2	---	Red	Water Clear	640	1.9	850	30	
563UIC-5	---	Red	Water Clear	640	1.9	2500	30	
563TSC-1	---	Red	Water Clear	630	2.2	3300	30	
563UGC-1	---	Green	Water Clear	568	2.1	330	30	
563ZGC-5	---	Pure Green	Water Clear	525	3.2	2400	30	
563XGC-5	---	Bluish Green	Water Clear	515	3.2	2650	30	
563UYC-1	---	Yellow	Water Clear	593	2	450	30	
563UYC-2	---	Yellow	Water Clear	593	2	850	30	
563UYC-5	---	Yellow	Water Clear	593	2	2650	30	
563TYC-1	---	Yellow	Water Clear	590	2	3300	30	
563UOC-1	---	Orange	Water Clear	610	1.9	600	30	
563UBC-2	---	Blue	Water Clear	470	3.5	950	30	
563UWC-2	---	White	Water Clear	X=0.3 Y=0.3	3.5	2150	35	
563UBC-5	---	Blue	Water Clear	470	3.5	1150	30	
563UWC-5	---	White	Water Clear	X=0.3 Y=0.3	3.5	2850	35	
563UWC-9	---	White	Water Clear	X=0.3 Y=0.3	3.5	6800	35	

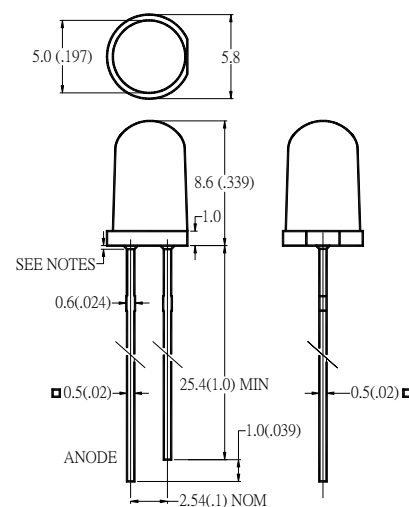

NOTES:

1. All dimensions are in millimeters.
2. Tolerance is +/- 0.2mm unless otherwise specified
3. Protruded resin under flange is 1.5mm MAX.
4. Specifications are subject to change without notice